


# QUICK-PRO

6 COMBINATIONS  
AUTOMATED  
STABILIZATION  
SYSTEM




Fully Automated Stabilization with Variable Areas which offers 6 different machine positioning combinations, simple to choose through the appropriate selector; by automatically interacting with the AWP system, it guarantees the operator the best possible outreach performance.



QUICK-PRO  
SELECTOR

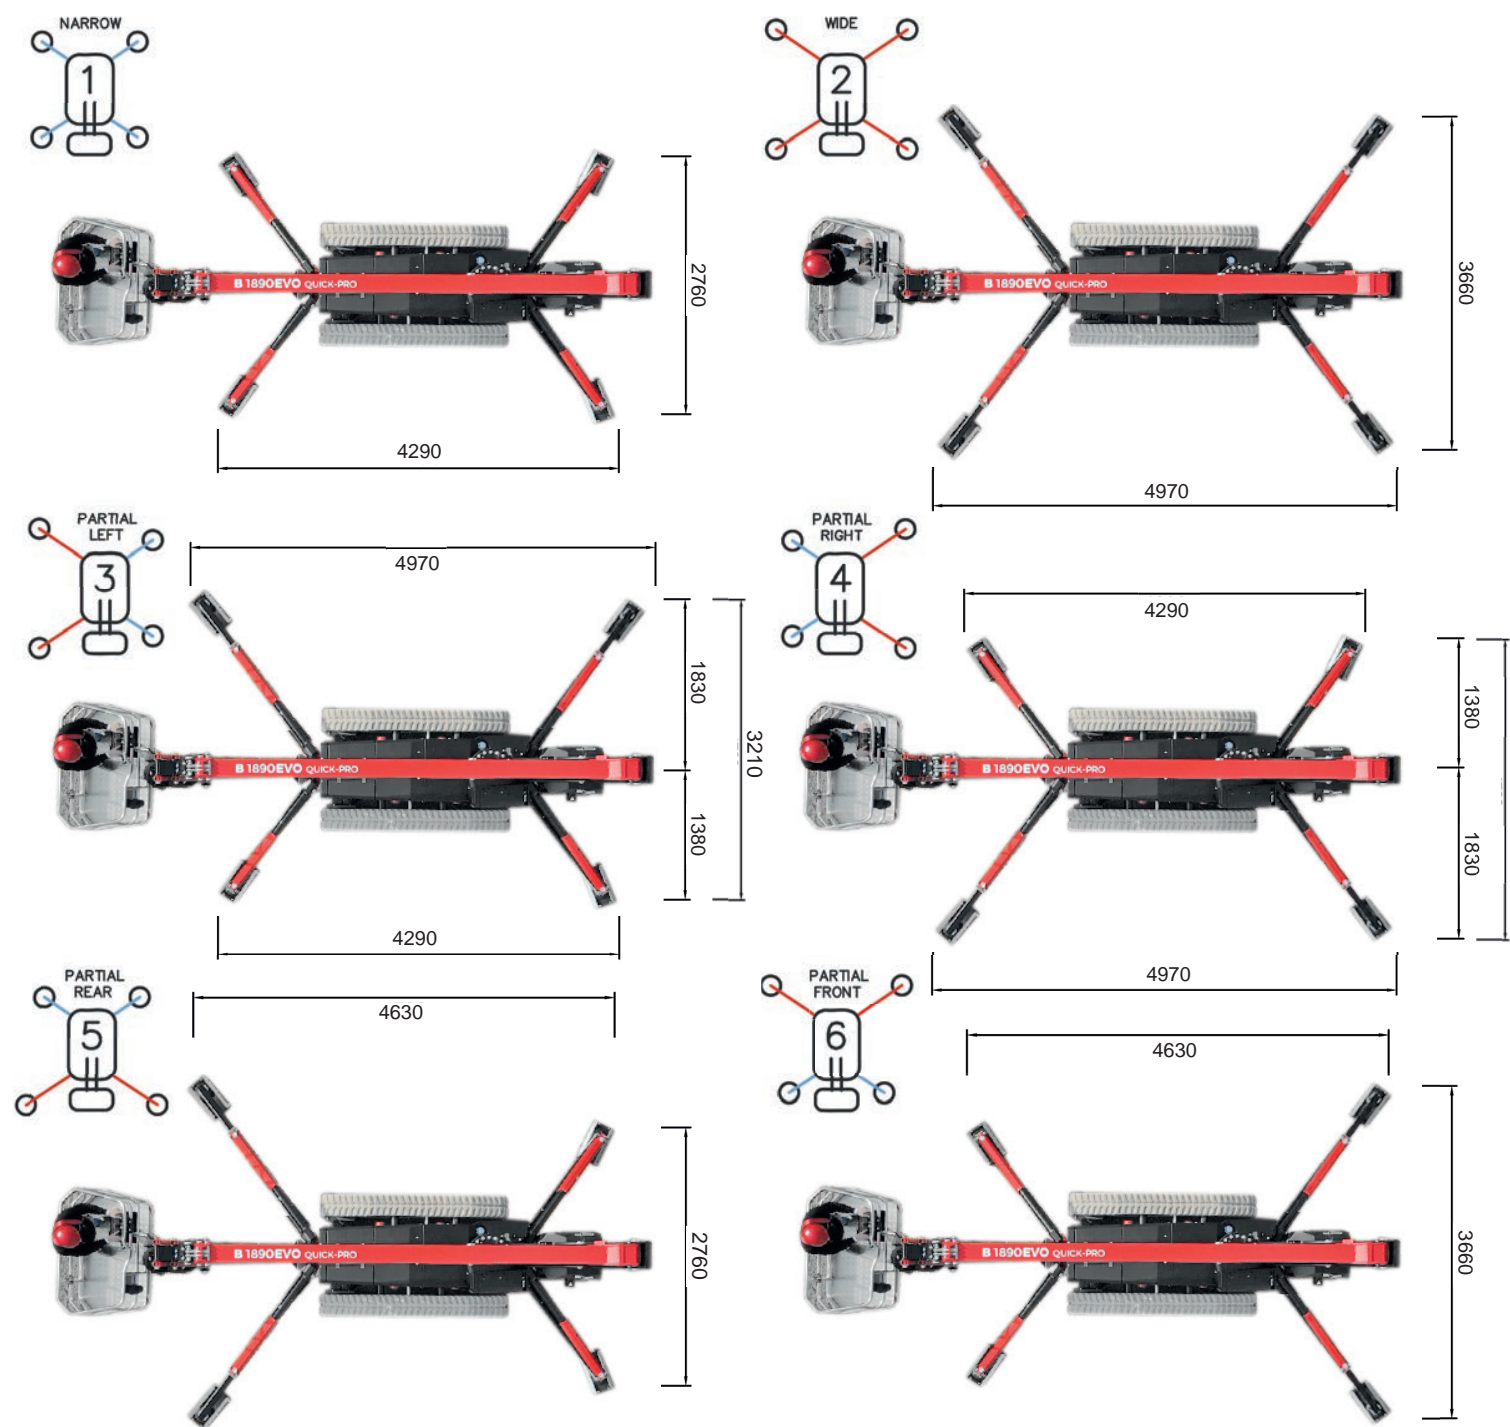

## B1890 QUICK-PRO

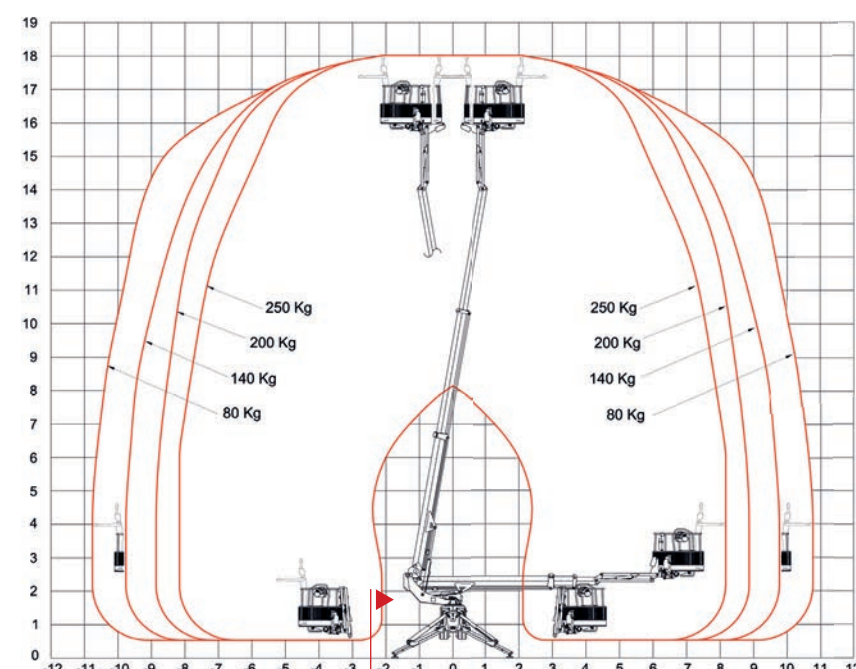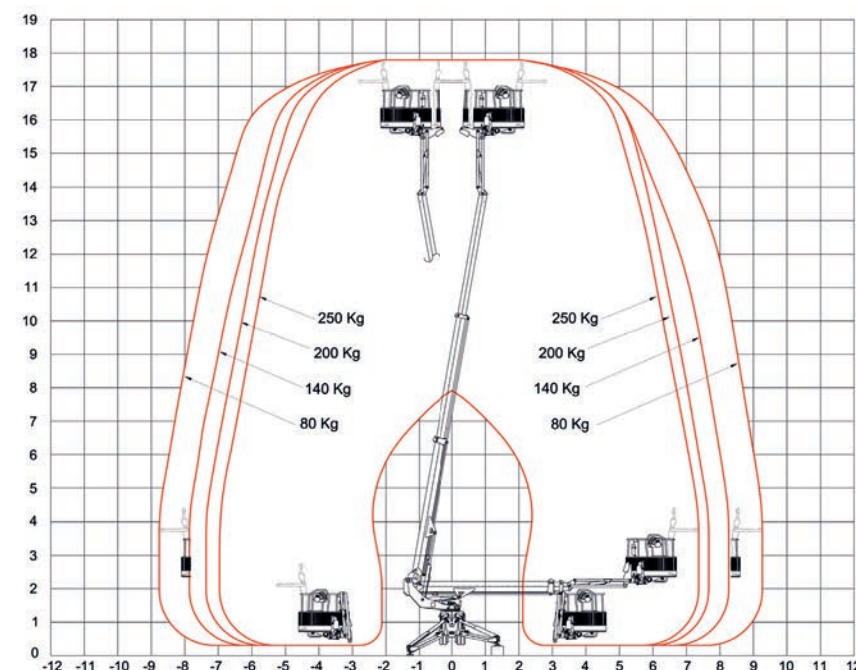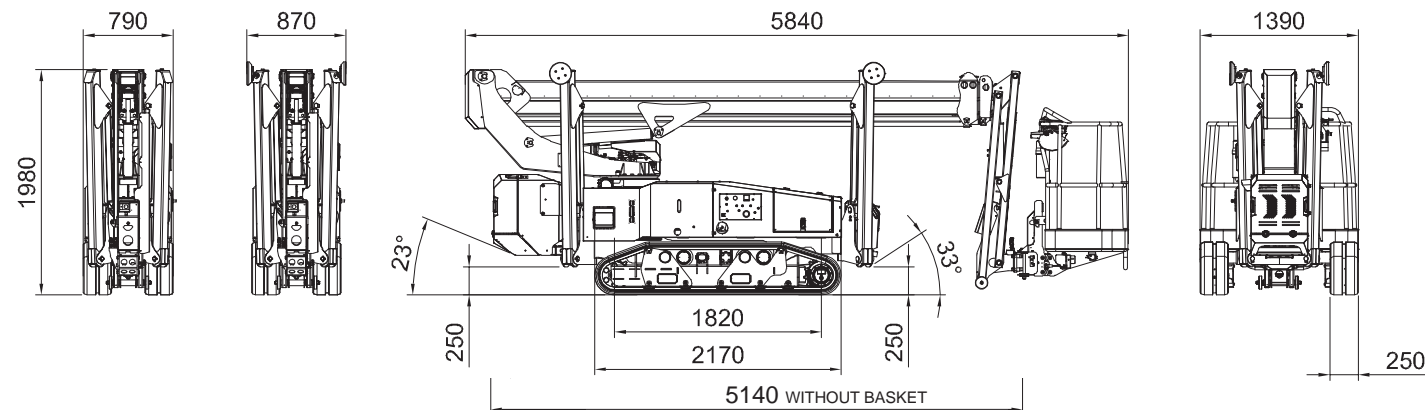

Zero tail swing

## AWP

ADAPTIVE  
WORKING  
PERFORMANCE

PATENT PENDING

EXTRA  
OUTREACH

ANGLE  
MONITORING

**ALMACRAWLER**   
ALMAC-PACIFIC.COM.AU

Almac Pacific  
Level 10, 68 Pitt Street, Sydney, NSW2000

info@almac-pacific.com.au  
www.almac-pacific.com.au

# BILLENNIUM QUICK-PRO

CRAWLER TELESCOPIC SPIDERBOOM



PATENT PENDING

## B1890 EVO



**ALMACRAWLER**   
ALMAC-PACIFIC.COM.AU

# BILLENNIUM

## B1890 QUICK-PRO

VERSATILITY  
EFFICIENCY  
CREATIVITY  
AGILITY


The Billennium Line features morphologically unique models to provide a superior user experience and greater market adaptability for the real needs of the rental and end-users sector alike.

The new Line is characterized by its unique automatic stabilization systems. There are two different types of stabilization: VISUAL with a single fixed area and the innovative Quick-PRO, a fully automated stabilization system with six different combination.



18mt.  
working  
height

A new concept  
to work at height...  
The SpiderBoom!



OPTIONAL

WINCH  
KIT  
200 KG

1.4 mt BASKET  
STANDARD



1.8 mt BASKET  
OPTIONAL



BASKET  
SIZE



780  
1200

A resizable basket that allows the operator to manually extend the basket sideways.

The Tasket Basket by AlmaCrawler is the only two-operator basket that does not require disassembly to go through narrow passages, extending from a minimum width of 0.78 m to a full 1.20 m.

OPTIONAL

TASKET  
RESIZABLE BASKET  
DISMOUNTING NOT REQUIRED

# XXL


ULTRA EXTENDABLE  
UNDERCARRIAGE  
SIZE “XXL”

# ATS

AUTOMATIC  
TENSIONER  
SYSTEM

The track tensioning system is a hydraulic cylinder directly connected to and controlled by the main hydraulic system.

The system creates **zero maintenance** because it ensures the constant and correct tensioning of the track itself.

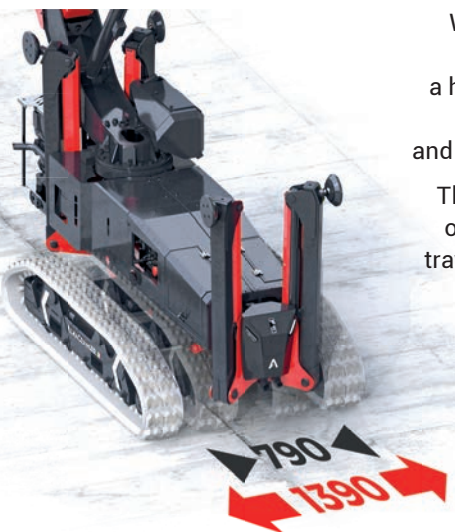

With a width of 1,39 m, a length of 2.17 m and a height of 0,47 m, these tracks are the longest and widest on the market.

Their size increases the operator's safety when travelling over rough and sloping terrain.



# SPS

SELF-PROPELLED  
SKILL SYSTEM

PATENT PENDING



EXTRA  
OUTREACH

# AWP

ADAPTIVE  
WORKING  
PERFORMANCE

PATENT PENDING

The SPS system is what allows the use of the Billennium Spiderbooms even without lowering the stabilizers, leveling longitudinally up to a maximum of 10° with a maximum working height of 9,40 m (max lateral slope 5°).

This is made possible by the seamless technological mix of proactive and dynamic leveling, the XXL undercarriage and an automatic hydraulic longitudinal leveling of the basket.

This system calculates the stabilization area in real time by measuring the angle of descend of each individual stabiliser in order to optimise the operational outreach performance over the entire working area up to an extra 0.5 m.

ALMACRAWLER  
ALMAC-PACIFIC.COM.AU

### Technical data

Max working height	18,00 m
Max height basket floor	16,00 m
Max moving height	9,40 m
Max outreach (load 80 kg)	10,80 m
Max outreach (load 140 kg)	9,80 m
Max outreach (load 200 kg)	8,90 m
Max outreach (250 kg)	8,20 m
Rotation angle	+/- 190°
Basket size	1,4 x 0,74 m
Basket rotation angle	+/- 70°
Max basket capacity	250 Kg
Length in stowed position (with detached basket)	5,84 m (5,14 m)
Min width in stowed position	0,79 m
Working width on tracks	1,39 m
Min height in stowed position	1,98 m
Longitudinal leveling by SPS	+/- 10°
Max lateral inclination with SPS	+/- 5 °
Max gradeability	20°
Max side gradeability max with (min with)	+/- 10 ° (+/- 5 °)
Maximum stabilisation area	3,65 m x 4,97 m
Stabilisation	Quick-PRO
Drive speed (fast)	2,60 Km/h
Drive speed while at high	0,40 Km/h
Non-marking tracks	Yes
Cable Remote LED Console or DISPLAY	Yes
ATS, AWP, SPS	Yes
Removable pads	Yes

### Weight

Total weight	~2940 Kg
--------------	----------

### Power

Main Power Source	YANMAR 2TNV70 10.2 kW (13.9 HP) @ 3600 rpm
Hydraulic gearmotors	Yes
Electric gearmotors	No
N°2 battery charger 20Ah-48 V	No

### Extras - On Demand

Tasket Basket	0,78 (1,20) x 0,7 m
Wide Basket	1,8 x 0,7 m
Hatz 1B40 Diesel engine	No
Kubota Z602 Diesel engine (T. weight 2920kg)	Yes
Eletric pump 220V-2,2KW / 50Hz	Yes
Radio remote display or led controller	Yes
Arctic lubricant for cold climate	Yes
Winch Kit Series 200 kg	Yes
Anticollision System	Yes
Customized powder coating (One Special Colour + BLACK 9005)	Yes

### B1890 QUICK-PRO

### EVO

Max working height	18,00 m
Max height basket floor	16,00 m
Max moving height	9,40 m
Max outreach (load 80 kg)	10,80 m
Max outreach (load 140 kg)	9,80 m
Max outreach (load 200 kg)	8,90 m
Max outreach (250 kg)	8,20 m
Rotation angle	+/- 190°
Basket size	1,4 x 0,74 m
Basket rotation angle	+/- 70°
Max basket capacity	250 Kg
Length in stowed position (with detached basket)	5,84 m (5,14 m)
Min width in stowed position	0,79 m
Working width on tracks	1,39 m
Min height in stowed position	1,98 m
Longitudinal leveling by SPS	+/- 10°
Max lateral inclination with SPS	+/- 5 °
Max gradeability	20°
Max side gradeability max with (min with)	+/- 10 ° (+/- 5 °)
Maximum stabilisation area	3,65 m x 4,97 m
Stabilisation	Quick-PRO
Drive speed (fast)	2,60 Km/h
Drive speed while at high	0,40 Km/h
Non-marking tracks	Yes
Cable Remote LED Console or DISPLAY	Yes
ATS, AWP, SPS	Yes
Removable pads	Yes

CONTROL  
DEVICE

Available on all models: LED or DISPLAY radio or remote controller. Both versions have been designed to be user-friendly and allow proportional joystick driving.

LED



DISPLAY



Simplify and centralize the management of all after-sales activities, spare parts purchasing and warranty procedures.

Providing 24/7 access to all technical documents and tools for daily management.

Manage all your ALMAC products in one single online portal.

MYALMAC  
CONTROL  
PANEL